

OWNER'S MANUAL

AUDIO SPLITTER

KONANlabs

KSP-AS25




Main Feature:

Audio splitter support 2 channel audio input and 12 channel output, used in the situation if there are over 2 sets of amplifier; there is 2 channels for extension using and 10 channels for distributed output by adjusting the volume. This equipment has good frequency response and feature of keep the origin sound; it set to support switch of single track and dual track, the front panel with audio gain-adjusting which brings convenient for the audio engineer, the back panel with switch of grounding which avoid inference perfectly.

Parameter:


Input power:	220V/50Hz
Consumption:	10W
Output sensitivity:	XLR 600Ω 775mV
Input sensitivity:	XLR 15KΩ 775mV
Frequency response:	20Hz---20KHz
S.N.:	≤90dB
Overall harmonic distortion:	≤0.5%
Dimensions:	482 x 445x 220 mm. 1 U rack 19"

Front Panel:

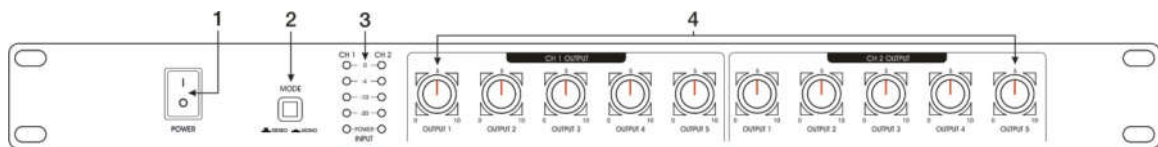


1. Power switch
2. Mode switch: Stereo/Mono
3. Input audio level indicator
4. Volume of CH1 output and CH2 output

Rear Panel:

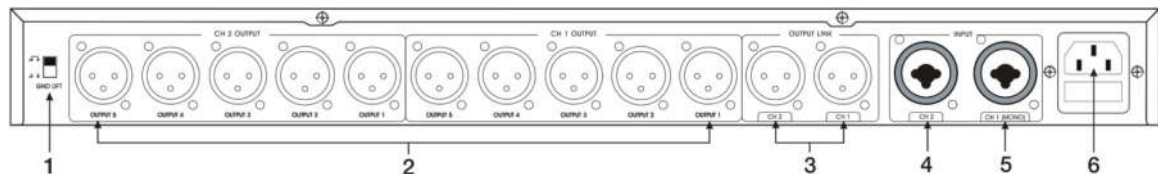


1. GND Lift,
2. CH1 output/CH 2 output
3. Output Link
4. Input socket of CH2 XLR and 6.35
5. Input socket of CH1 XLR and 6.35
6. 220V/50Hz

Mode Mono

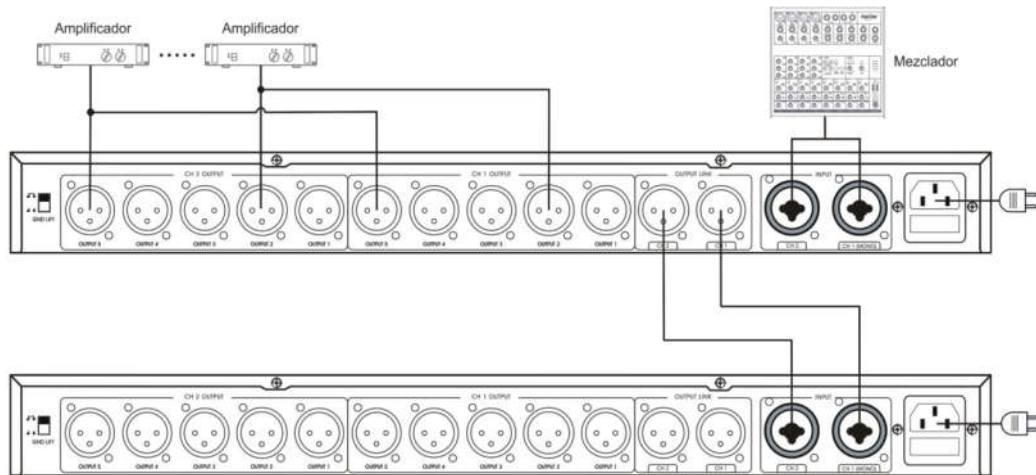

Mode Stereo

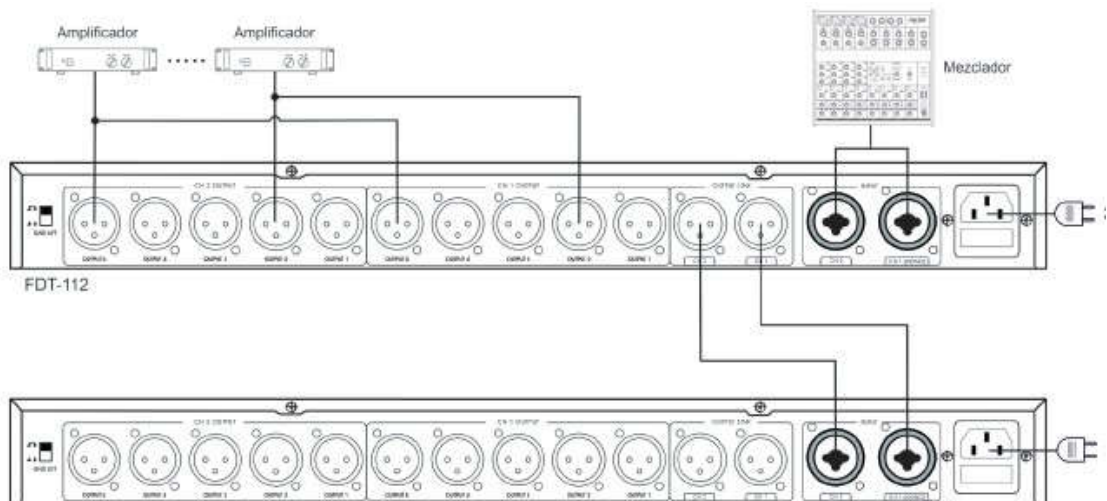

Warning

Please prevent the equipment dripping by water, do not put the liquid articles such as vase on the equipment.

The power switch of the equipment is mono-pole; please pullout the plug if the equipment will not be used for a long time. The switch has already been turned on when the power indicator lamp is on, and the switch has already been turned off when the power indicator lamp is off.

This machine has no maintain part, for preventing electric shock from being dangerous, do not turn on the machine cover without permission. If the equipment needs to be maintained, please contact sale agent.

The appearance of the products is subject to material object; we remain the right to modify any issue without notice in advance.